

TENUTE MECCANICHE IN WIDIA

WIDIA MECHANICAL SEALS

SERIE / SERIES RTW



TENUTA

WIDIA - Guarnizioni in gomma nitrile.

Seal

WIDIA - Nitrile rubber gaskets.

CONTROFACCIA

WIDIA - Guarnizioni in gomma nitrile.

Counterface

WIDIA - Nitrile rubber gaskets.

APPLICAZIONE


Tenuta meccanica a senso di rotazione dipendente (di serie con molla destra).
Adattabile su qualsiasi tipo d'elettropompa con prestazione speciale e per liquidi abrasivi.

Si sconsiglia l'utilizzo in bagno d'olio.

Application

Mechanical seal with dependent rotation direction (standard with right spring).
Adaptable to any type of pump with special performance and for abrasive fluids.

Use in oil bath is NOT recommended.

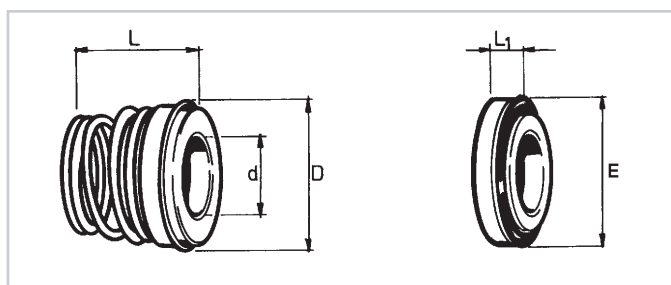

LIMITI D'IMPIEGO

$p = 10 \text{ atm} - t = -20^\circ\text{C} \div + 90^\circ\text{C} - v = 20 \text{ m/s.}$

Limits of use

$p = 10 \text{ atm} - t = -20^\circ\text{C} \div + 90^\circ\text{C} - v = 20 \text{ m/s.}$

Tenuta completa di controfaccia / Seal complete with counterface

Articolo Art.	d Ø Albero d Ø Shaft	D	L Lung. lavoro L Working length	E	L ₁
RTW.310	10	19.5	15	18.1	5.5
RTW.311	12	22.5	18	20.6	5.5
RTW.312	13	24.5	22	23.1	6
RTW.313	14	24.5	22	23.1	6
RTW.314	15	29	22	26.9	7
RTW.315	16	29	23	26.9	7
RTW.316	17	29	23	26.9	7
RTW.317	18	32.5	24	30.9	8
RTW.318	19	32.5	25	30.9	8
RTW.319	20	32.5	25	30.9	8
RTW.320	22	37.5	25	35.4	8
RTW.321	24	37.5	27	35.4	8
RTW.322	25	40	27	38.2	8.5
RTW.323	28	46	29	43.3	9
RTW.324	30	46	30	43.3	9
RTW.325	32	46	30	43.3	9
NOVITÀ NEW RTW.326	33	48	39	53.5	11.5
NOVITÀ NEW RTW.327	35	50	39	53.5	11.5
NOVITÀ NEW RTW.328	38	55	39	60.5	11.5
NOVITÀ NEW RTW.329	40	55	39	60.5	11.5